




400 VFFS

The ultimate self adhesive label applicator suitable for installing on a wide range of Vertical Form, Fill & Seal Machines.

Thanks to its modular construction and unparalleled compactness, the HERMA 400 is the ideal solution when it comes to integration into most popular form, fill & seal machines or flow wrappers.

- The HERMA 400 is always a perfect fit.
- The integrated servo control eliminates the need for an external control box and a host of cumbersome interconnecting cables.
- The labelling speed is exactly synchronized to the speed of the web, giving precise label placement at all speeds.
- In excess of 500 successful installations.
- Flexibility, ease of operation, simple installation and ultra-compactness make the HERMA 400 the first-choice applicator for integration into VFFS/HFFS form, fill & seal machines.

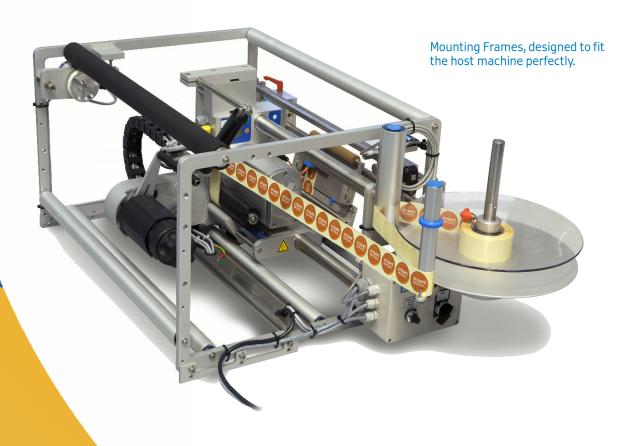

400 VFFS

HERMA 400 for VFFS Machines - Compact, Modular and Servo Controlled.

The labeller range with a modular system...



Well thought out details:

Simply move the counter plate aside when threading the web.



The advantages of HERMA 400 models at a glance:

- > Control integrated into the applicator no separate control box required
- > Clearly laid out operating panel
- > Wide range power input 100AC...240V AC +/- 10%, 50 Hz...60Hz
- > Automatic synchronisation of labelling and product speeds
- > Special unwind unit giving consistent web tension
- Comprehensive range of modules: pedestals, label sensors, printing and embossing units always a perfect fit
- > Available as left-hand and right-hand versions, for upright, horizontal or suspended operation, width in increments of 80 mm/3" up to 320mm/12"
- > Configured for PLC connection
- > Transparent label sensing available as standard
- > Integration with the most coders/printers



AIS (Automatic Identification Systems) Ltd Unit 48 Canal Walk Park West Ind Park Nangor Road Dublin 12, Ireland

Tel: + 353 (0) 1 620 5742 NI: (028) 9071 8912 Fax: + 353 (0) 1 620 5735



Everything under control

For individually configuring your applicator the clearly laid out display panel allows for convenient and simple adjustment to the operating parameters.